

**ISUZU BERPENGALAMAN DENGAN
MESIN COMMON RAIL SEJAK 2011**

ISUZU
ELF
NLR MICROBUS

**IRIT MAKSIMAL,
MUAT PENUMPANG
OPTIMAL**



**euro4
ready**

- Gambar pada brosur ini hanya ilustrasi, mungkin ada perbedaan dengan aktual kendaraan
- Mesin common rail pada Isuzu Giga sejak tahun 2011

REAL PARTNER. REAL JOURNEY.

SPESIFIKASI TEKNIS

SPESIFIKASI		NLR B	NLR B L
DIMENSI / DIMENSION			
Panjang / Overall Length [OAL]	mm	5,150	6,520
Lebar / Overall Width [OW]	mm	1,835	1,835
Tinggi / Overall Height [OH]	mm	2,590	2,590
Jarak Sumbu / Wheelbase [WB]	mm	2,490	3,360
Julur Depan / Front Overhang [FOH]	mm	1,110	1,110
Julur Belakang / Rear Overhang [ROH]	mm	1,550	2,050
Jarak Terendah ke Tanah / Min. Clearance [HH]	mm	190	190
Jejak Depan / Front Tread [AW]	mm	1,475	1,475
Jejak Belakang / Rear Tread [CW]	mm	1,395	1,395
Kapasitas Penumpang / Passenger Capacity		15 + 1 (Driver)	19 + 1 (Driver)
MESIN / ENGINE			
Model		4JJ1-TCC	
Tipe / Type		Direct Injection, Commonrail, DOHC, 4 Cylinder with VGS Turbo Intercooler	
Sistem Kontrol Emisi	mm	EURO4 with EGR & DOC	
Diameter x Langkah / Bore x Stroke	cc	95.4 X 104.9	
Isi Silinder / Piston Displacement	PS/rpm	2,999	
Tenaga Maksimum / Max. Power	Kgm/rpm	120 / 2,600	
Torsi Maksimum / Max. Torque		36 / 1,500 - 2,600	
TRANSMISI / TRANSMISSION			
Model		MY6S	
Perbandingan Gigi / Gear Ratio	1st	5.979	
	2nd	3.434	
	3rd	1.862	
	4th	1.297	
	5th	1.000	
	6th	0.759	
	Rev	5.701	
Perbandingan Gigi Terakhir / Final Gear Ratio		4.300	



SPESIFIKASI		NLR B		NLR B L	
BERAT / WEIGHT					
Berat Total Kendaraan / Gross Vehicle Weight [GVW]		kg	5,100		
Kapasitas Gardan Depan / Capacity Front Axle		kg	2,460		
Kapasitas Gardan Belakang / Capacity Rear Axle		kg	2,640		
REM / BRAKE					
Tipe/Type		Hydraulic			
Rem Kaki / Service Brake		Hydraulic saluran ganda dengan vacuum booster			
Rem Tangan / Hand Brake		Expanding pada transmisi belakang			
Sistem Pengereman Gas Buang / Exhaust Brake		Exhaust brake, tuas berada di stir			
RODA / TYRE					
Ukuran Ban		225/75/R16			
Ukuran Velg		16 X 7.00			
SUSPensi / SUSPENSION					
Depan / Front		Semi elliptical laminated leaf spring dengan shock absorber berdaya ganda			
Belakang / Rear					
LAIN-LAIN / OTHERS					
Kapasitas Tangki / Fuel Tank Capacity		litr	75	100	
Radius Putar Minimum / Min. Turning Radius		m	5.7	7.4	
Daya Tanjak Maksimum / Max. Gradeability		%	38		
Kecepatan Maksimum / Max. Speed		km/h	116		
Aki / Accu		V-Ah	2 X 12 V - 65 Ah		
Alternator		V-A	24 - 50		
Kamera Mundur / Reverse Parking Camera		Ada			
Audio Head Unit		Ada			
USB Charging System		Ada			
APAR (Alat Pemadam Api Ringan)		Ada			
Fan Blower		Ada			
Garansi / Warranty		3 Tahun / 100,000 km			

* Untuk meningkatkan mutu dan penyesuaian dengan perkembangan teknologi, spesifikasi dapat berubah sewaktu-waktu tanpa pemberitahuan.

** Ilustrasi merupakan contoh sebagian aplikasi di lapangan.


* Untuk meningkatkan mutu dan penyesuaian dengan perkembangan teknologi, spesifikasi dapat berubah sewaktu-waktu tanpa pemberitahuan.
 ** Ilustrasi merupakan contoh sebagian aplikasi di lapangan.

DIMENSI

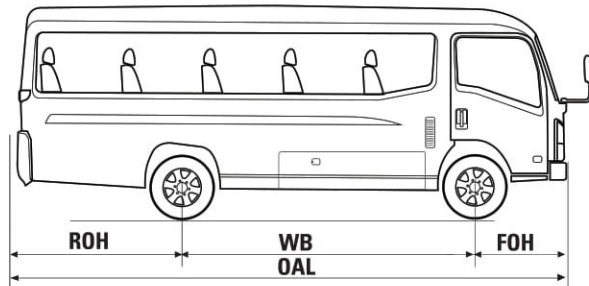

APLIKASI

BUS

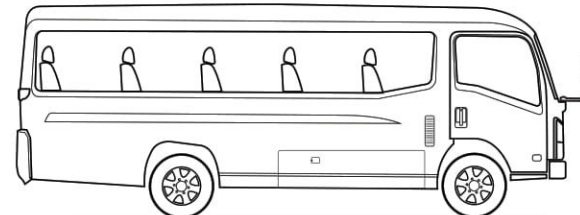

SCAN INI
UNTUK
INFORMASI
LEBIH LANJUT



Agan Pemegang Merek & Distributor :

PT ISUZU ASTRA MOTOR INDONESIA



www.isuzu-astra.com