

**ISUZU BERPENGALAMAN DENGAN
MESIN COMMON RAIL SEJAK 2011**

**ISUZU
GIGA
FTR**



**IRIT MAKSIMAL,
MUATAN OPTIMAL**

**euro4
ready**

*Gambar pada brosur ini hanya ilustrasi, mungkin ada perbedaan dengan aktual kendaraan
**Mesin common rail pada Isuzu Giga sejak tahun 2011


REAL PARTNER. REAL JOURNEY.

SPESIFIKASI TEKNIS

SPESIFIKASI		FTR P	FTR S	FTR T
SISTEM PENGGERAK RODA / DRIVE TRAIN				
Sistem Penggerak Roda / Drive Train		4X2		
DIMENSI / DIMENSION				
Panjang / Overall Length [OAL]	mm	8,550	10,050	10,785
Lebar / Overall Width [OW]	mm	2,400		
Tinggi / Overall Height [OH]	mm	2,775		
Jarak Sumbu / Wheelbase [WB]	mm	5,050	6,050	6,500
Julur Depan / Front Overhang [FOH]	mm	1,440		
Julur Belakang / Rear Overhang [ROH]	mm	2,060	2,560	2,845
Jarak Terendah ke Tanah / Minimum Clearance [HH]	mm	276		
Dimensi Chassis	mm	850 x 253 x 7.5	850 x 254 x 8	
Jejak Depan / Front Tread [AW]	mm	1,990		
Jejak Belakang / Rear Tread [CW]	mm	1,790		
Cabin to End [CE]	mm	6,440	7,940	8,675
MESIN / ENGINE				
Model		4 HK1-TCS		
Tipe / Type		Direct Injection, OHC, 4 Cylinder, VGS Turbo Intercooler		
Sistem Kontrol Emisi		EURO4 with EGR & DOC		
Diameter x Langkah / Bore x Stroke	mm	115 X 125		
Isi Silinder / Piston Displacement	cc	5,193		
Tenaga Maksimum / Maximum Power	PS/rpm	210 / 2,600		
Torsi Maksimum / Maximum Torque	Kgm/rpm	72 / 1,600 - 2,600		
TRANSMISI / TRANSMISSION				
Model		MZW6P		
Perbandingan Gigi / Gear Ratio	1st	6.615		
	2nd	4.095		
	3rd	2.358		
	4th	1.531		
	5th	1.000		
	6th	0.722		
	Rev	6.615		
Perbandingan Gigi Terakhir / Final Gear Ratio		6.500		


SPESIFIKASI		FTR P	FTR S	FTR T
BERAT / WEIGHT				
Berat Kosong Kendaraan / Curb Weight	kg	4,340	4,500	4,580
Berat Total Kendaraan /Gross Vehicle Weight [GVW]	kg	14,000		
Kapasitas Gardan Depan / Capacity Front Axle	kg	5,150		
Kapasitas Gardan Belakang / Capacity Rear Axle	kg	8,850		
REM / BRAKE				
Tipe/Type		Air Over Hydraulic		
Rem Kaki / Service Brake		Air Over Hydraulic		
Rem Tangan / Hand Brake		Mekanisme Expanding di Transmisi Output		
Sistem Pengereman Gas Buang / Exhaust Brake		Ada		
RODA / TYRE				
Ukuran Ban		9.00-20-14PR [Miller]		
Ukuran Velg		8STUD 20X6.50T		
SUSPENSI / SUSPENSION				
Depan / Front		Rigid Suspension dengan Multi Leaf Spring		
Belakang / Rear				
LAIN-LAIN / OTHERS				
Kapasitas Tangki / Fuel Tank Capacity	ltr	200		
Radius Putar Minimum / Minimum Turning Radius	m	8.7	10.3	10.6
Daya Tanjak Maksimum / Maximum Gradeability	%	35		
Kecepatan Maksimum / Maximum Speed	km/h	107		
Aki / Accu	V-Ah	2 x 12 V - 65 Ah		
Alternator	V-A	24 - 50		
Rubber Damper Cabin Suspension		Ada		
Audio Head Unit		Ada		
USB Charging System		Ada		
APAR (Alat Pemadam Api Ringan)		Ada		
Kamera Mundur / Reverse Parking Camera		Ada		
Garansi / Warranty		1 Tahun / 50,000 km		
* Untuk meningkatkan mutu dan penyesuaian dengan perkembangan teknologi, spesifikasi dapat berubah sewaktu-waktu tanpa pemberitahuan.				
** Ilustrasi merupakan contoh sebagian aplikasi di lapangan.				

DIMENSI

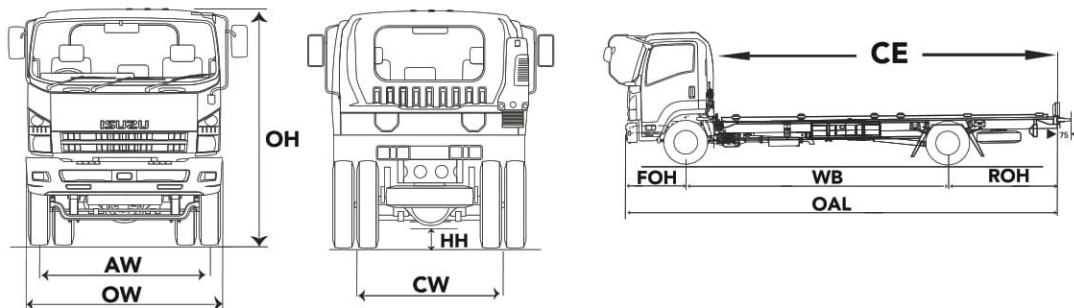


APLIKASI


WING BOX



BOX ALUMINIUM



ANGKUTAN MOTOR



SCAN INI
UNTUK
INFORMASI
LEBIH LANJUT



Agen Pemegang Merek & Distributor :

PT ISUZU ASTRA MOTOR INDONESIA



www.isuzu-astra.com